




i314[®] Submittal

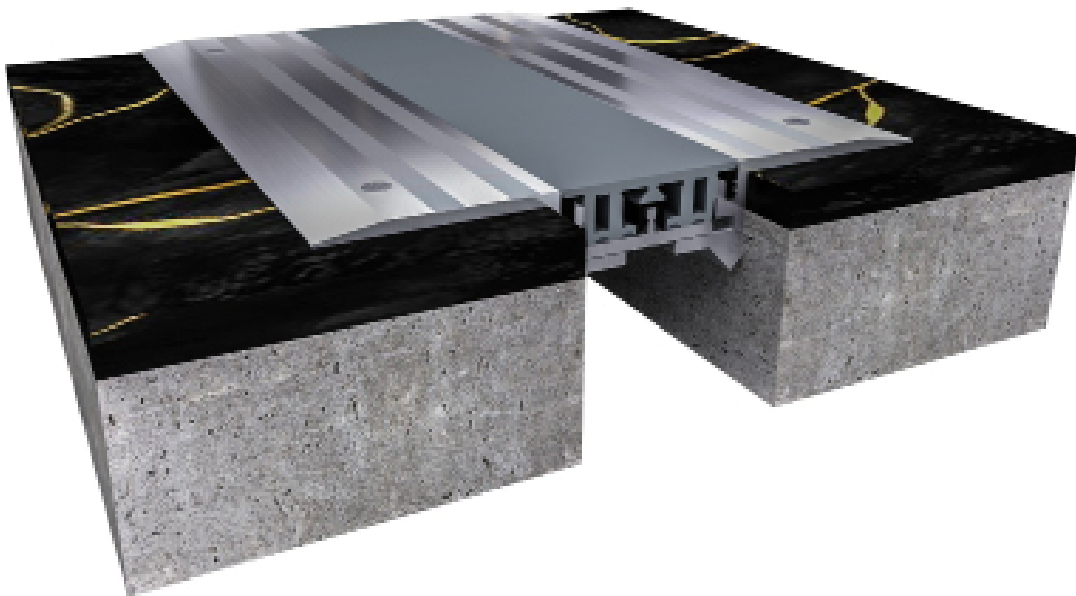

Expansion Joint Floor Systems

i314[®]



Description


The i314[®] a System is a recessed mount floor expansion joint system. can coordinate with your desired flooring finish.

Key Features

- **Install Condition:** Floor/Floor, Floor/Wall .
- **Joint width:** 25-50mm.
- System is ideal for retrofit applications.
- Designed to accommodate several different floor finishes such as tile, wood, or concrete.
- Easy to clean flush seals, no dirt or water traps.
- Standard and Custom seal colors available.
- Dual durometer seal provides a secure fit and optimal flexibility.
- Snap-fit design for easy on site assembly.
- Standard loading capabilities.
- Aluminum mill finish.

Materials

Aluminum: Alloy types of 6061-T6, 6063-T6, 6005A, or 5052-H32 sheet goods.

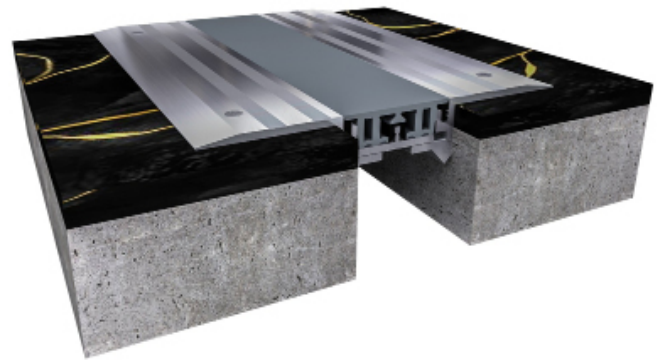

Application Instructions

Installation: Joint systems: Install in accordance with manufacturer's instructions.

Align work plumb, level and flush with adjacent surfaces. Mechanically anchor to substrate. Allowances should be made where actual structural gap at time of installation varies from nominal design gap. No shimming of frames is permitted. Coordinate with work of other Sections.

If concrete blockouts (rebates) are required, ensure continuous support equal to surrounding substrate structural values.

Fire Rated Assemblies: Where required, install to manufacturer's instructions.

Moisture Barrier: Where required, install to manufacturer's instructions.

Protect: the completed Expansion Control system work from damage during construction. Damage protection includes surface abrasion and overloading of coverplate by materials handling equipment and construction waste/debris. Protection from environmental factors required throughout installation process until Project Closeout. Protection includes but is not limited to rain events, moisture protection, exposure to temperature fluctuations or direct sunlight for temperature sensitive product offerings.

Store

Store components in original containers in a clean, dry location. Ensure temperature or moisture sensitive components are stored in a tempered location.

Contractor to provide temporary protective covers on all installed finished surfaces. Protection is required to guard against both surface abrasions as well as overloading of horizontal deck components by construction traffic .

Movement ± 25%


Application	System	W	H1	H2	S	B	Movement +/-		L
		Joint Width	Frame Height 1	Height 2	Sightline	Blockout	Horizontal	Vertical	Load
		mm	mm	mm	mm	mm	mm	mm	Kn
Floor/Floor	i314-25	25	16	*	120	*	6	6	40
	i314-50	50	25	*	140	*	13	13	30
Floor/Wall	i314-C-25	25	16	*	75	*	6	6	40
	i314-C-50	50	25	*	95	*	13	13	30

Expansion Joint Floor Systems


i314[®]




Series i314 - Floor to Floor

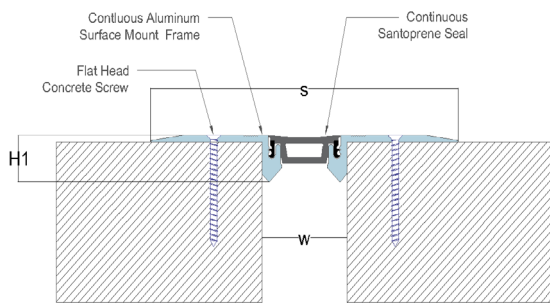


Series i314 C - Floor to Wall

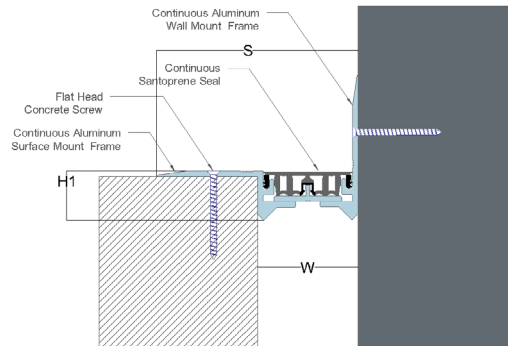

Series i314 - Mineral Wool & Sealant Fire Barrier Options

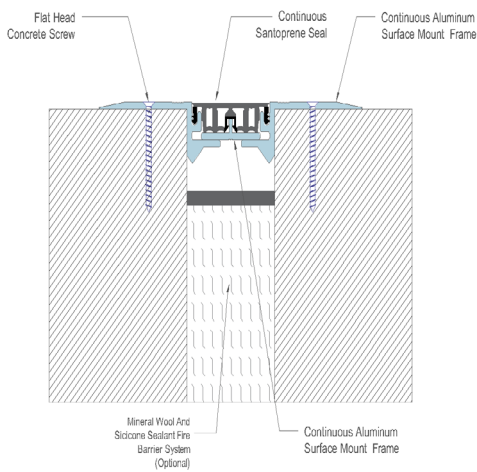

Series i314 - iFlex PVC Options

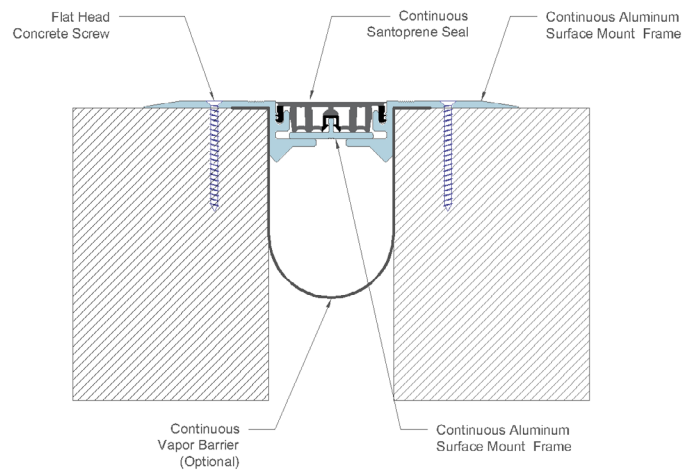

i314[®]



Our Previous Submittals & Approvals

الشركة المنفذة	الجهة المالكة	استشاري عام المشروع
طلب جديد	RAID-EL SALAM -MS- REV 00	رقم الطلب
طلب معاد	28/09/2024	التاريخ
مشروع الأوتوبيس الترددي - الطريق الدائري - محطات القلج - المرج - الخصوص		
طلب اعتماد		
AR <input type="checkbox"/>	ST <input type="checkbox"/>	EL <input type="checkbox"/>
ME <input checked="" type="checkbox"/>	رسومات <input type="checkbox"/>	مستندات <input type="checkbox"/>
مواد <input type="checkbox"/>	مقاولي باطن <input type="checkbox"/>	عينات <input checked="" type="checkbox"/>
نتائج اختبار <input type="checkbox"/>	الخرى <input type="checkbox"/>	surv <input type="checkbox"/>
من: المسلام انترناشيونال	إلى: مكتب الرائد للاستشارات الهندسية	
اعتماد فواصل ألومنيوم لزوم الحوائط والارضيات شركة CHEM		الموضوع
I314 / I840-50		الوصف
		منطقة الصل
رقم المورد والمصنع	رقم المواصفة	رقم البند
		المرفقات
مستندات <input type="checkbox"/>	تقارير اختبارات <input type="checkbox"/>	ضمان منتجات <input type="checkbox"/>
مستندات أخرى <input type="checkbox"/>	حسابات <input type="checkbox"/>	رسومات تنفيذية <input type="checkbox"/>
		كتالوجات <input type="checkbox"/>
		شهادات اعتماد <input type="checkbox"/>
		عينات <input checked="" type="checkbox"/>
		سابقة خيرة <input type="checkbox"/>
المقاول:		
	مدير المشروع	مهندس الجودة
ملاحظات الإستشاري		
تم الاعتماد للعوائط I314 و I840-50 للارضيات على ان يتم تقديم Memo وعمل عينة عاجلة على حالات الفواصل المختلفة طبقاً للواقع حسب بعد الفاصل تحت إشراف المكاتب . ويتم سحب عينة أثناء التوريد لإجراء الاختبارات اللازمة . يتم الإلتزام بطريقة التركيب المقدمة من الشركة المنفذة .		
مدير المنطقة	احمد خالد	مهندس الاستشاري
		مهندس الجودة
مرفوض <input type="checkbox"/>	يراجع ويعاد التقديم <input type="checkbox"/>	يعتمد مع الملاحظات <input checked="" type="checkbox"/>
وارد		صادر

i314 Submittal - November 2024, Version 1.1.6

Office : 22 El-Shaheed Mohamed Abd
El-Hadi Street, Nasr City, Cairo
Website : www.iChemEg.com
Email : info@ichemeg.com

