


i920[®] Submittal

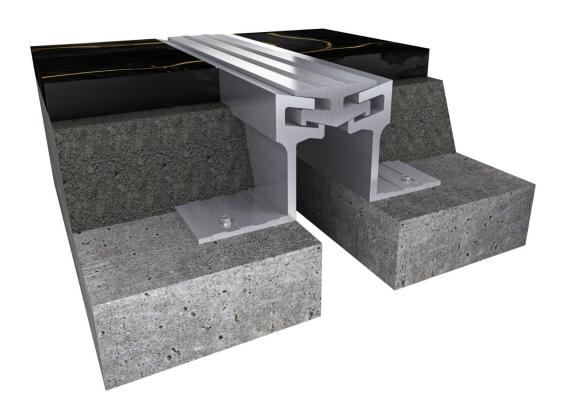

Floor to Floor

Floor System for Heavy Loads

i920®


















The **i920**[®] floor expansion joint system is a cost effective solution for high load bearing spaces that encounter vehicular traffic such as parking garages, warehouses and more.

Key Features

- · Install Condition: Floor/Floor.
- Joint width: 25-50mm.
- Designed with a crisp, narrow surface profile to minimize visual sightline.
- High loading capacity capable of withstanding heavy maintenance equipment.
- · Self-Centering .
- Ideal for large Civil and Government projects.
- Alignment pins allow for easy continuous straight installation.
- · Mill finish aluminum.

Materials

Aluminum: Alloy types of 6061-T6, 6063-T6, 6005A, or 5052-H32 sheet goods.

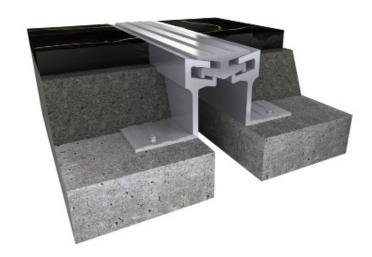

Application Instructions

Installaion: Joint systems: Install in accordance with manufacturer's instructions.

Align work plumb, level and flush with adjacent surfaces. Mechanically anchor to substrate. Allowances should be made where actual structural gap at time of installation varies from nominal design gap. No shimming of frames is permitted. Coordinate with work of other Sections.

If concrete blockouts (rebates) are required, ensure continuous support equal to surrounding substrate structural values.

Fire Rated Assemblies: Where required, install to manufacturer's instructions.

Moisture Barrier: Where required, install to manufacturer's instructions.

Floor to Floor

Floor System for Heavy Loads

i920[®]



Protect: the completed Expansion Control system work from damage during construction. Damage protection includes surface abrasion and overloading of coverplate by materials handling equipment and construction waste/debris. Protection from environmental factors required throughout installation process until Project Closeout. Protection includes but is not limited to rain events, moisture protection, exposure to temperature fluctuations or direct sunlight for temperature sensitive product offerings.

Store

Store components in original containers in a clean, dry location. Ensure temperature or moisture sensitive components are stored in a tempered location.

Contractor to provide temporary protective covers on all installed finished surfaces. Protection is required to guard against both surface abrasions as well as overloading of horizontal deck components by construction traffic.

Movement ± 25%

	w	H1	H2	S	В	Moveme	nt +/-	L
System	Joint Width	Frame Height 1	Height 2	Sightline	Blockout	Horizontal	Vertical	Load
	mm	mm	mm	mm	mm	mm	mm	Kn
i920-25	25	50	*	34	57	6	*	50
i920-50	50	50	*	60	57	13	*	50

Floor to Floor


Floor System for Heavy Loads


i920[®]



Series i920 - Floor to Floor


Series i920 - Mineral Wool & Sealant Fire Barrier Options

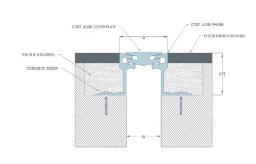


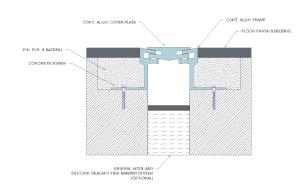

Series i920 - iFlex PVC Options

Series i920 - FireStop S30 Options



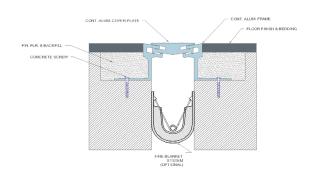

i920[®]




Our Previous Submittals & Approvals

Floor System for Heavy Loads

i920[®]



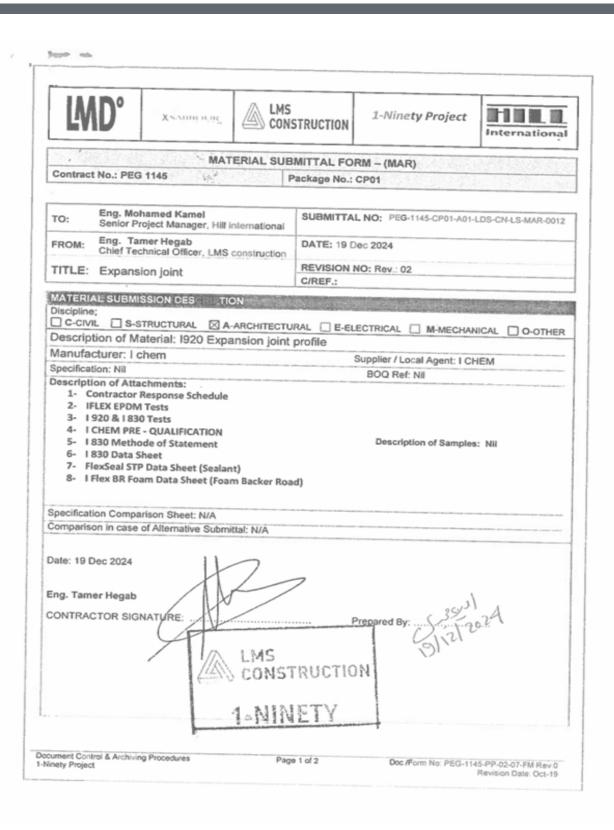



LWD.	Жалисиль	LMS	1-Ninety Project	International
Contract No - DE		IATERIAL SUBMITTAL FOI		
Hill Receive:		Package No.:	1	0 1
On the Miles	2524	tional)		RECEIVED RECEIVED 2 1 DECLA
Name:		Signature:	Date:	
PROJECT MANAG	SEMENT CONSU	LTANT'S REVIEW - (Hill Inte	mational)	
		Signature:	110 - Date:	22-12-2-1
Name: Mana	and Saka	Signature:	110 - Date:	25-13-2-1
Name: Alaha M	NSULTANTIS C B - APPROVED A PROCEED - II	Signature:	C-REVISE/RESUBMIT	D- REJECTED
Name: Alaha M	ONSULTANT'S COMPROCEED - II	Signature: As H-L-d OMMENTS S NOTED, WORK MAY NCORPORATE COMMENTS	C-REVISE/RESUBMIT	D- REJECTED

i920 Submittal - January 2024, Version 1.1.5

Page 7

: 22 El-Shaheed Mohamed Abd El-Hadi Street, Nasr City, Cairo : www.iChemEg.com : info@ichemeg.com

Office

Website Email